


CONDUIT DIMENSIONS	
CONDUIT OD	
NOMINAL	ACTUAL
2"	2.375
4"	4.500
8"	8.625




TOP VIEW

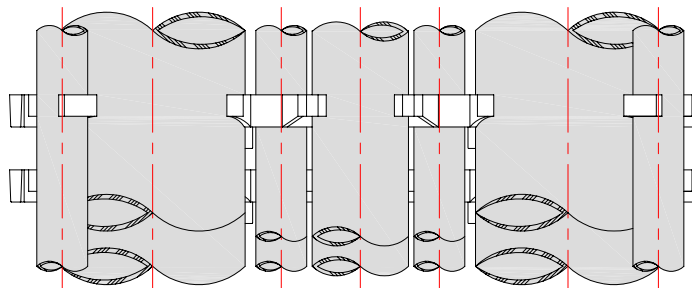


RETENTION BAND

NOTES:

1. THE 28482W34-3 WAS FIRST USED FOR A 345kv DUCT BANK FOR DEPTHS LESS THAN 7'-6" BELOW GRADE.
2. THIS DRAWING SHOWS 2 EACH OF UDI CATALOG NO. 28482W34-3.
3. PLACE DUCT SPACERS 5 FEET APART.
4. CONDUIT IS SUPPLIED BY OTHERS.
5. "(TYP)" INDICATES THE DIMENSION IS TYPICAL OF TWO OR MORE PLACES.
6. SOME CONTRACTORS HAVE FOUND THAT PLACING A RETENTION BAND OR A PLASTIC CABLE TIE OVER THE EARS OF THE WUNPEECE SPACER REDUCES THE POSSIBILITY OF THE SPACER DISLODGING DURING THE CONCRETE POUR (SEE PHOTO AT LEFT).

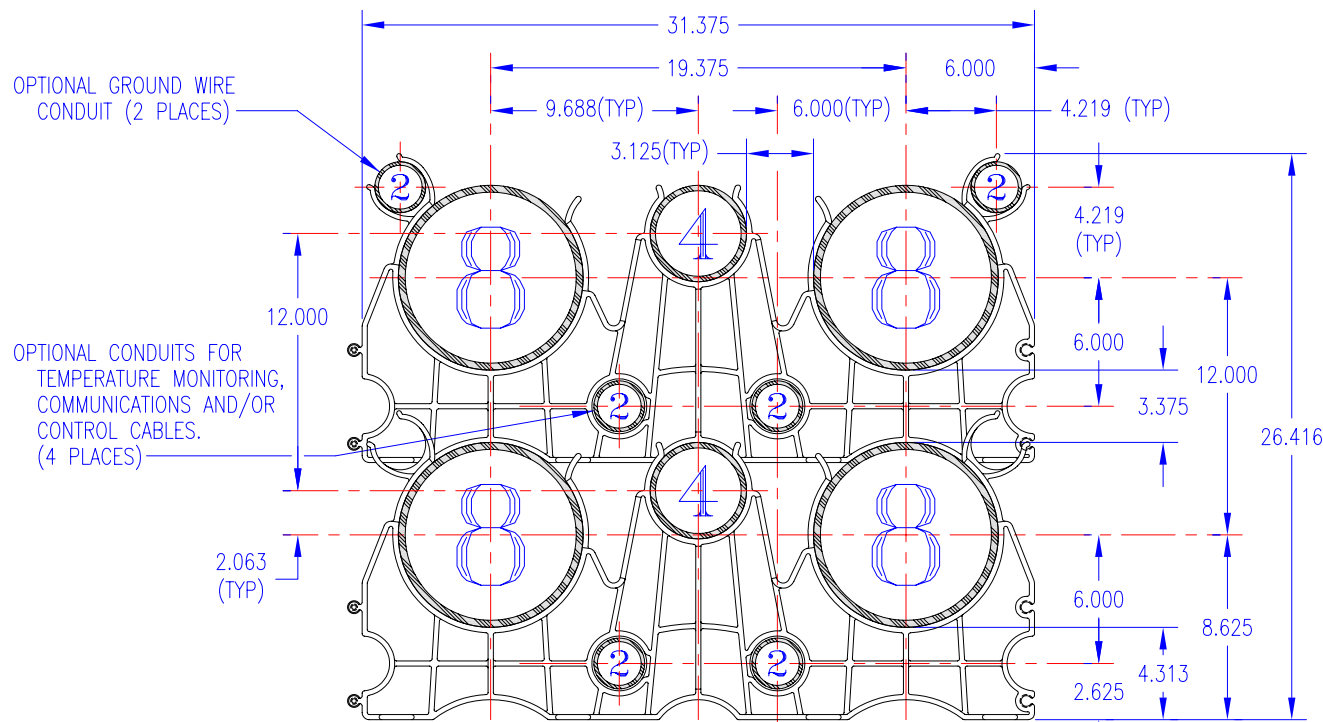


FRONT VIEW

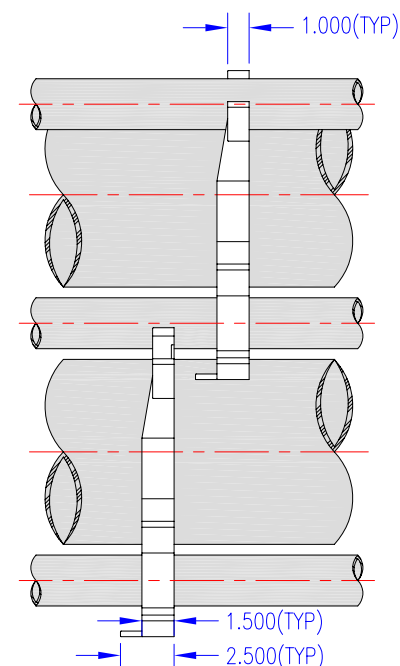

RIGHT SIDE VIEW

UNDERGROUND DEVICES
CATALOG NUMBER:
28482W34-3



28482W34-3 WUNPEECE® DUCT SPACER
OUTLINE DRAWING

SCALE: See At Left DESIGNED BY: Don McCoy DETAIL BY: Alan Armstrong CHECKED BY: Don McCoy
DATE: 2-19-07 APPROVED BY: REVISION B 4-18-07

1st Designed For UDI LIBRARY OF
OUTLINE & INSTALLATION DRAWINGS FOR AutoCAD®

UNDERGROUND DEVICES, INC. 90-4351
NORTHBROOK, ILLINOIS 60062 - PHONE: (847) 205-9000 PAGE 1 OF 1

DRAWING NUMBER:
90-4351
PAGE 1 OF 1