


[illegible]

RETENTION BAND

A close-up photograph of a black pipe with a white retention band. A blue arrow points from the text 'RETENTION BAND' to the band. A white arrow points to the band's attachment point on the pipe.

1. THE 2882W34-2 WAS FIRST USED FOR A 345kv DUCT BANK FOR DEPTHS LESS THAN 7'-6" BELOW GRADE.
2. THIS DRAWING SHOWS 2 EACH OF UDI CATALOG NO. 2882W34-2.
3. PLACE DUCT SPACERS 5 FEET APART.
4. CONDUIT IS SUPPLIED BY OTHERS.
5. "(TYP)" INDICATES THE DIMENSION IS TYPICAL OF TWO OR MORE PLACES.
6. SOME CONTRACTORS HAVE FOUND THAT PLACING A RETENTION BAND OR A PLASTIC CABLE TIE OVER THE EARS OF THE WUNPEECE SPACER REDUCES THE POSSIBILITY OF THE SPACER DISLODGING DURING THE CONCRETE POUR (SEE PHOTO AT LEFT).

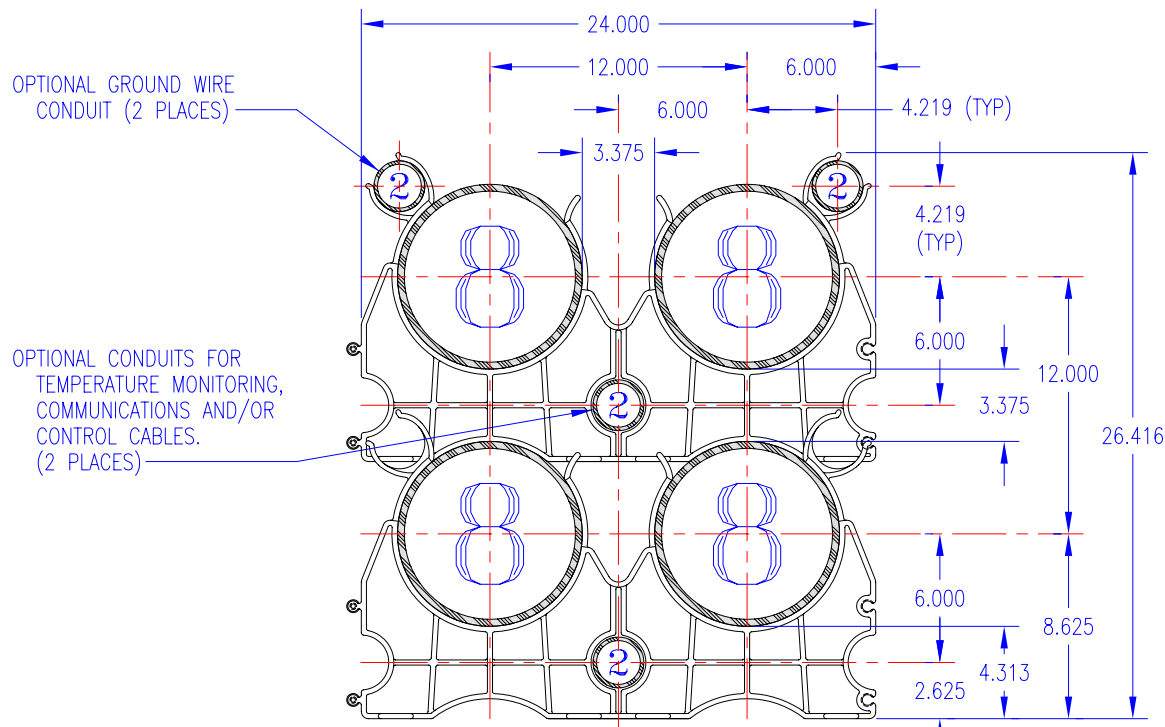

RIGHT SIDE VIEW

SCALE:



1.000



UNDERGROUND DEVICES, INC. NORTHBROOK, ILLINOIS 60062 - PHONE: (847) 205-9000