




GENERAL USAGE GUIDE LINES:

1. PRODUCT CAN HOLD UP TO A 3" DIAMETER CABLE.
2. RECOMMENDED FOR TEMPORARY JOB SITE USE OR PERMANENT INSTALLATION IN MANHOLES OR VAULTS.
3. PRODUCT MADE OF POLYCARBONATE, SO NO GROUNDING REQUIRED.
4. TO BE USED WITH 1/2" MAX. DIAMETER ROPE OR WIRE (SUPPLIED BY OTHERS).

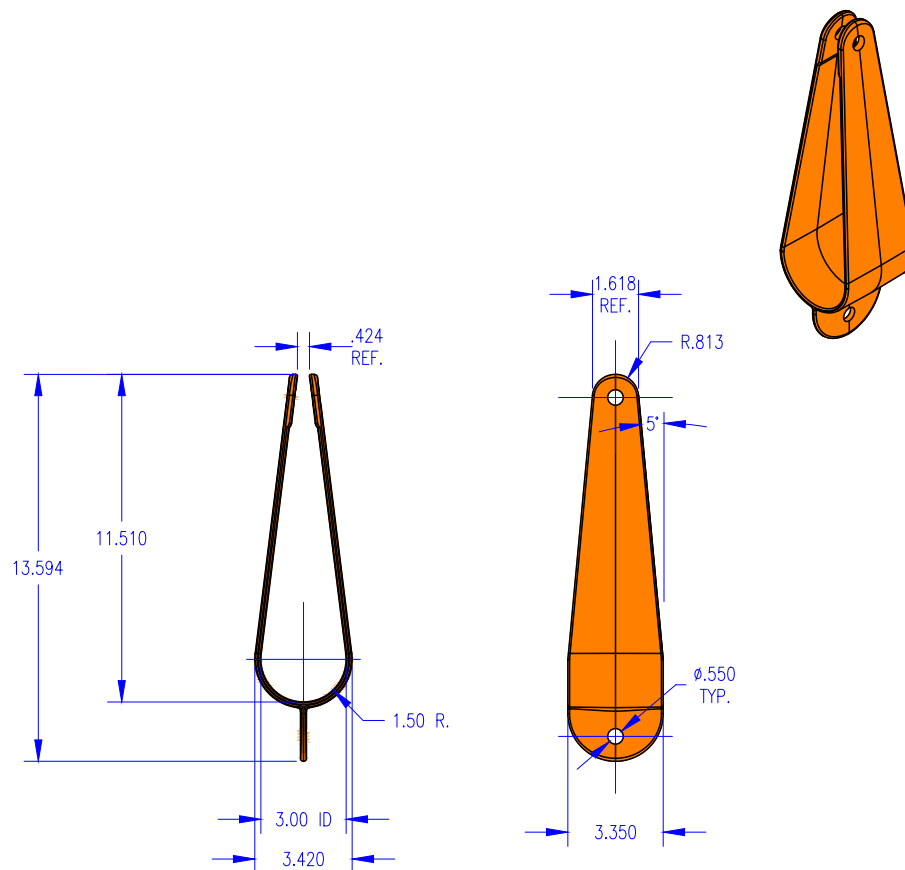

* U.S. PATENT No. 228737 *



3CS CABLE SLING INSTALLATION DETAILS (Installation On CABLE OR ROPE)

SCALE: See At Above	DESIGNED BY: Don McCoy	DETAILED BY: Alan Armstrong	CHECKED BY: Don McCoy
DATE: 9-5-24	APPROVED BY:	REVISION:	

1st Designed For TYPICAL INSTALLATION OF CABLE SLINGS

UNDERGROUND DEVICES, INC.	DRAWING NUMBER:
NORTHBROOK, ILLINOIS 60062 - PHONE: (847) 205-9000	90-14463
	PAGE 1 OF 1